


Purity

Timeless elegance and enduring simplicity allowing for endless versatility.




builder
essentials
BY B&F CERAMICS


Colors at a glance

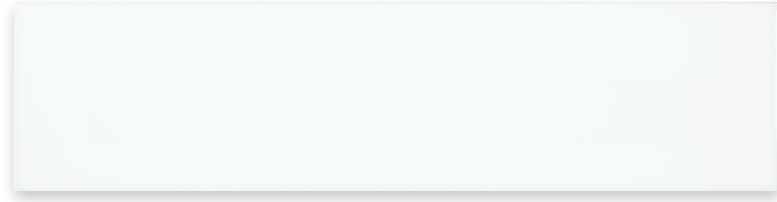

1. Ice

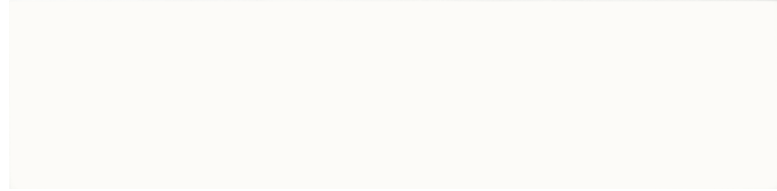

2. Ivory

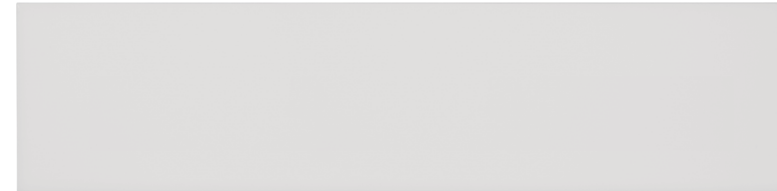

3. Breeze

Formats and finishes at a glance



4 x 16 in / 10 x 40 cm
Pressed
Glossy / Matte

Colors: 1, 2, 3



3 x 12 in / 7.5 x 30 cm
Pressed
Glossy / Matte


Colors: 1, 2, 3



3 x 6 in / 7.5 x 15 cm
Pressed
Glossy / Matte

Colors: 1, 2, 3

Trims



6 x 6 in / 15 x 15 cm
Cove Base
Glossy / Matte

Color: 1



2 x 8 in / 5 x 20 cm
Bullnose
Glossy / Matte


Colors: 1, 2, 3



2 x 6 in / 5 x 15 cm
Bullnose
Glossy / Matte

Colors: 1, 2, 3

Breeze



4 x 16 in Pressed
Glossy: BF416PGB
Matte: BF416PMB



3 x 12 in Pressed
Glossy: BF312PGB
Matte: BF312PMB



3 x 6 in Pressed
Glossy: BF36PGB
Matte: BF36PMB



2 x 8 in Bullnose
Glossy: BF28PBNGB
Matte: BF28PBNMB




2 x 6 in Bullnose
Glossy: BF26PBNGB
Matte: BF26PBNMB




Ice



4 x 16 in Pressed
Glossy: BF416PGIC
Matte: BF416PMIC



3 x 12 in Pressed
Glossy: BF312PGIC
Matte: BF312PMIC



3 x 6 in Pressed
Glossy: BF36PGIC
Matte: BF36PMIC



6 x 6 in Cove Base
Glossy: BF66PCBGI
Matte: BF66PCBMI




2 x 8 in Bullnose
Glossy: BF28PBNGIC
Matte: BF28PBNMIC




2 x 6 in Bullnose
Glossy: BF26PBNGIC
Matte: BF26PBNMIC


Ivory



4 x 16 in Pressed
Glossy: BF416PGIV
Matte: BF416PMIV




3 x 12 in Pressed
Glossy: BF312PGIV
Matte: BF312PMIV




3 x 6 in Pressed
Glossy: BF36PGIV
Matte: BF36PMIV



2 x 8 in Bullnose
Glossy: BF28PBNGIV
Matte: BF28PBNMIV



2 x 6 in Bullnose
Glossy: BF26PBNGIV
Matte: BF26PBNMIV

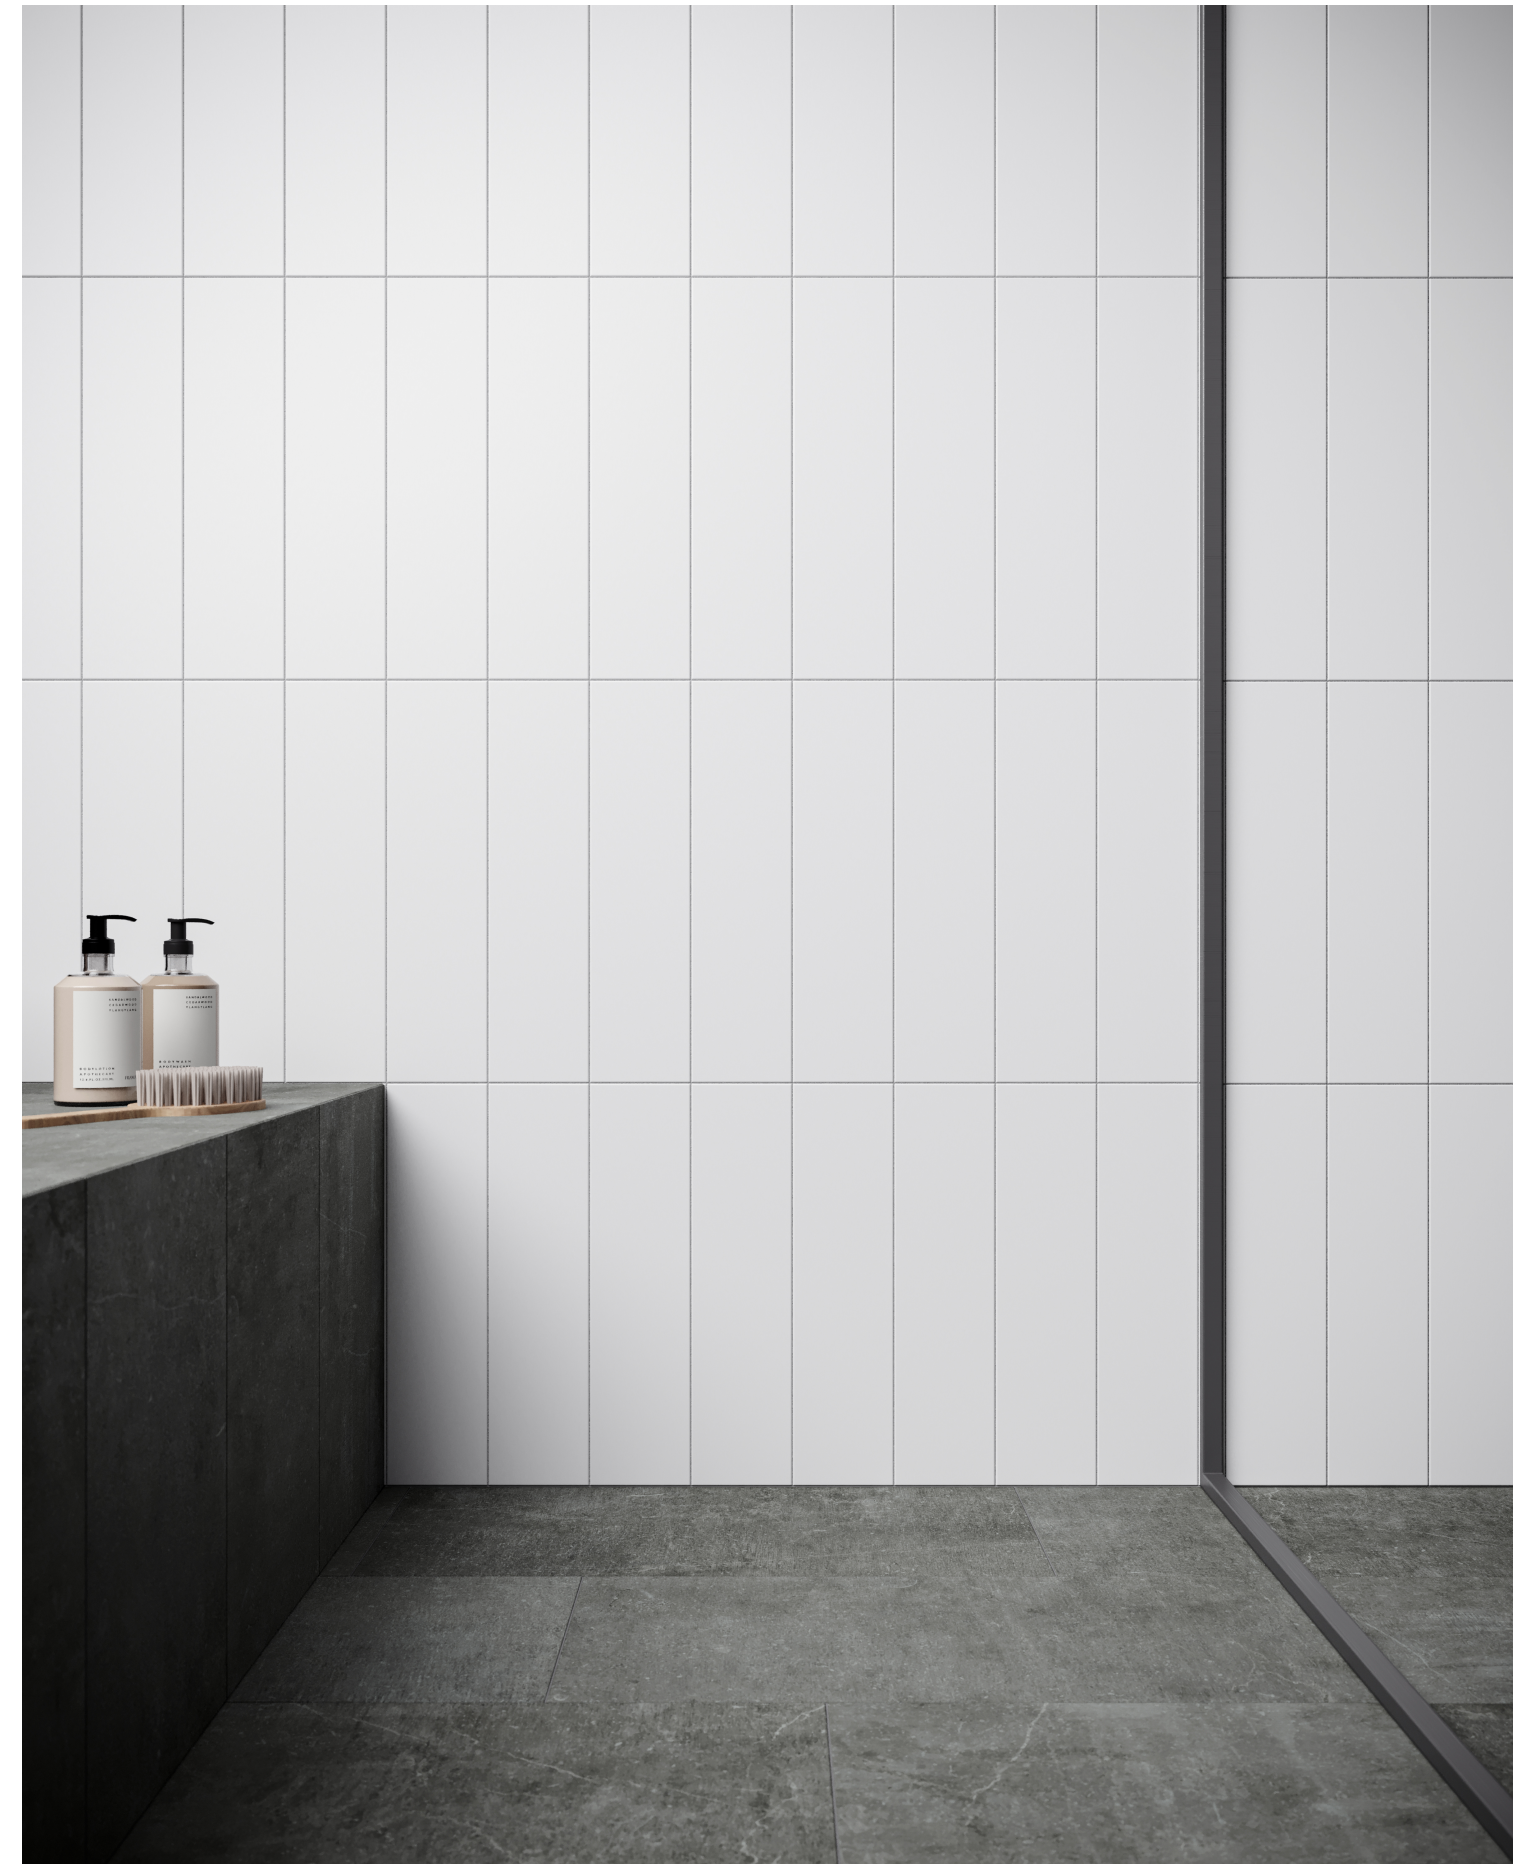










Product and Packaging information, *Tiles and trims*

Key logistical details including item codes and product specifications.

Purity Product & Packaging Information Glazed Ceramic	ICE		IVORY		BREEZE		LBS	KGS	PCS	SQFT	M2	BXS	SQFT	M²		
	ITEM CODE	ITEM CODE	ITEM CODE	ITEM CODE	ITEM CODE	ITEM CODE	BOX	BOX	BOX	BOX	BOX	SKID	SKID	SKID		
	ACTUAL DIMENSIONS	THICKNESS	GLOSSY	MATTE	GLOSSY	MATTE	GLOSSY	MATTE	GLOSSY	MATTE						
4 x 16 in / 10 x 40 cm PRESSED GLAZED CERAMIC TILE	100 x 400 mm	7.8 mm	4000-0292-0	4000-0293-0	4000-0296-0	4000-0297-0	4000-0294-0	4000-0295-0	32.70	16.26	28	12.06	1.12	60.00	723.60	67.20
3 x 12 in / 7.5 x 30 cm PRESSED GLAZED CERAMIC TILE	75 x 300 mm	7.8 mm	4000-0286-0	4000-0287-0	4000-0290-0	4000-0291-0	4000-0288-0	4000-0289-0	27.32	14.60	44	10.66	0.99	68.00	724.88	67.32
3 x 6 in / 7.5 x 15 cm PRESSED GLAZED CERAMIC TILE	75 x 150 mm	7 mm	4000-0280-0	4000-0281-0	4000-0284-0	4000-0285-0	4000-0282-0	4000-0283-0	25.70	13.10	88	10.66	0.99	68.00	724.88	67.32
6 x 6 in / 15 x 15 cm PRESSED GLAZED CERAMIC COVE BASE	150 x 150 mm	7 mm	4002-0183-0	4002-0184-0	N/A	N/A	N/A	N/A	23.32	12.66	40	9.69	0.9	54.00	523.26	48.60
2 x 8 in / 5 x 20 cm PRESSED GLAZED CERAMIC BULLNOSE	50 x 200 mm	7.5 mm	4002-0177-0	4002-0178-0	4002-0181-0	4002-0182-0	4002-0179-0	4002-0180-0	21.00	11.64	80	8.61	0.8	70.00	602.70	56.00
2 x 6 in / 5 x 15 cm PRESSED GLAZED CERAMIC BULLNOSE	50 x 150 mm	7 mm	4002-0171-0	4002-0172-0	4002-0175-0	4002-0176-0	4002-0173-0	4002-0174-0	25.60	12.66	135	10.87	1.01	68.00	523.26	68.68

Technical information, *Tiles and trims*

Tile collection performance based on industry standards.

Technical Information			
	WATER ABSORPTION	ANSI / ISO - (%)	10% ≤E ≤16% - P4
	ABRASION RESISTANCE	ANSI / ISO	CLASS 0
	SCRATCH HARDNESS	ANSI / ISO - (Mohs)	GLOSSY 4, MATTE 4 >570
	BREAKING STRENGTH	ANSI - (lbf) ISO - (N)	
	SHADE VARIATION		V1
	SLIP RESISTANCE	ANSI - DCOF (WET) ISO - R VALUE	GLOSSY N/A GLOSSY N/A MATTE N/A MATTE N/A
	CHEMICAL RESISTANCE	ANSI / ISO	CLASS A
	STAIN RESISTANCE	ANSI ISO	CLASS A CLASS 5
	FROST RESISTANCE	ANSI / ISO	NOT RESISTANT

Test values are based on ANSI / ISO standards according to: ANSI A137.1 Non-Vitreous P4 Class, ISO 13006 - L - Group BIII, EN 14411- L - Group BIII. Variances in test values can occur in different production lots.

Usage recommendation, *Tiles and trims*

Anatolia's recommendations for suitable applications.

Usage Recommendations*		GLOSSY GLAZED CERAMIC		MATTE GLAZED CERAMIC	
APPLICATION		WALL	FLOOR	WALL	FLOOR
INTERIOR	RESIDENTIAL	•		•	
	COMMERCIAL	•		•	
	HEAVY COMMERCIAL	•		•	
EXTERIOR	RESIDENTIAL / COMMERCIAL				

* These recommendations are not defined by ANSI/ISO standards.